

ULTRA-QUIET AND EASY TO INSTALL MOTORIZED ROMAN BLIND SYSTEM





CONTRACT

RESIDENTIAL





vear

The Forest BCS tubular motor has a 10-year warranty.

BCS® - Blind Contract System

A motorized blind system for medium to heavy weight applications. Ultra quiet <44dB and easy to install.



61019-25 white 19' aluminum extrusion

BCS MOTORIZED ASSEMBLED SYSTEM - please specify wall or ceiling mount, number of cord roll supports, remote or wall switch and any other components needed. Counterweights will be sent only on request and at no extra charge.

APPLICATION Motorized SHADE STYLE Roman Balloon MOUNTING Wall Ceiling MAX WEIGHT 8.75 lbs./cord roll 45 lbs./motor MAX WIDTH 120" depending on application

BCS Components



61119-25 BCS 8-Angle Tube, 19'



62309-25 BCS End Caps left & right box of 25



63001-25 BCS Klick Bracket Wall/Ceiling Bracket box of 25



62100-25BCS Center Support 2" x 2.25"
box of 25



BCS Cord Roll House & Drum contains 18' cord box of 25



BCS Snap Cord Leveler to adjust counterweight box of 1000



BCS Tube Support place on open end of tube box of 25



61125-25 BCS Velcro 7/8" x 4' bundle of 25



49006-25 Fiberglass Rod, 19' bundle of 250



49005-25 BCS Counterweight, 19' aluminum 1" x 1/8" bundle of 20



49400-25Shroud
73 yds. per roll

BCS Motor and Control Options



62901-25Forest Tubular Motor built-in RF receiver, 35mm (1 3/8"), 110v, 6 Nm 1/box



52931-25D white

52931-59D black 52933 -59 Black -59 Bl Diamond Sense Remote Diamond RF, 15 channel w/ holder 1/box



52933-25 white 52933-59 black -59 Black Diamond Wall Switch 1/box




COMING SOON!

62904-25RF Dongle for integration Includes USB cable and micro USB connector 1/box





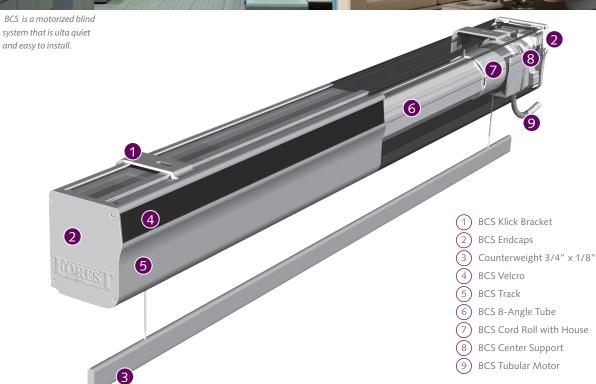


BCS Product Information

- Elegant shaped aluminum profile, with hook tape
- Quality aluminum profile chromated, powder coated
- Easy assembly and smooth operation guaranteed
- Simple and quick installation with smart klick® bracket
- Manual setting of the tubular motor
- Radio Frequency control
- Easy to connect to building automation systems
- $\bullet \;\;$ Cord drums can be placed at any position in the profile
- Max fabric weight per cord roll: 8.75 lbs; total system 45 lbs*
- Maximum height 18'
- Tubular motor with 26 rpm*1) rotation speed which results in 6.1 cm/sec*1) velocity
- Torque: 6 Nm
- Length: 19'

BCS Mounting

Wall and ceiling mount options



BCS Adjusting Motor

The BCS tubular motor can be adjusted remotely.

