



 **KIRSCH**[®]
DRAPERY HARDWARE
ARCHITRAC[®]

P R A C T I C A L

Precision

A perfect union of efficiency and performance, it's no wonder Architrac® can be found in such a variety of spaces. From homes, businesses and commercial applications, Architrac® offers multiple configurable styles to suit your needs and exceed your expectations. This performance focused product will glide through your most demanding applications with ease.



CONTENTS

02\ Overview & Benefits

04\ Series 94001

06\ AMP™ Motorization

08\ Series 93001

10\ Series 94003

12\ Series 94004

14\ Series 94005

16\ Series 9046

18\ Series 9600

20\ K-Rail

OVERVIEW & BENEFITS

Why Architrac®?

The Architrac® heading system supports the three most popular drapery heading styles, Ripplefold™, pleated and cubicle. Outstanding functionality for commercial applications, versatile enough for residential applications, Architrac® delivers performance for the most demanding applications. All assembled sets come complete and ready-to-install, and are available in baton and cord draw systems, or Series 94001 can be upgraded with AMP™ Motorization.

A perfect complement to the Architrac® series, our new K-Rail allows you to use any of our 1 $\frac{3}{8}$ " finials from any of our collections, no matter the material or finish. You now have the ultimate power to customize your design since our K-Rail is designed in finishes that complement all of our collection finishes perfectly. You can finally bring your project to another level of customization.

Benefits & Features

AMP™ Motorization

- Easy to use
- Quiet, powerful motor
- Pleated or Ripplefold™ drapery heading styles
- Available on Architrac® Series 94001 or Estate™ Rods only
- For more information on AMP™ Motorization see page 6

Ripplefold™

- Panels can be pressed flat, yet fall into folds
- Headings are suspended under the track
- No hooks or pins to install
- Stack back space is less than conventional Pleated draperies
- Draperies snap on and off carriers for easy installation
- Interior drapery appearance is identical to exterior-facing drapery appearance

Pleated

- Can be used with most track systems using slip-in or pin-on hooks
- Headings can be suspended under the track or over the face of the track to conceal hardware
- A popular drapery heading style

Cubicle

- An excellent choice for where privacy is necessary; often found in healthcare facilities, this heading style can be used more creatively as a soft treatment room divider or a unique shower curtain rod
- Smooth, snag free operation
- Made of extruded aluminum for extra durability
- Inner surface is center grooved for easy installation

Architrac® at a Glance

To help determine which system is right for your project, use the guideline below to select the best fit.

ARCHITRAC® SERIES	94001 BEST SELLER	93001	94003	94004 BEST SELLER	94005	9046	9600	K-RAIL
What is your preferred Draw type?								
Cord Draw	•	•						
Hand Baton Draw	•		•	•	•	•	•	•
AMP™ Motorized	•							
What is your preferred Drapery Heading type?								
Pleated	•	•	•	•	•	•	•	•
Cubicle			•	•	•	•	•	•
Ripplefold™	•	•	•	•	•			•
What is your mounting location?								
Ceiling Mount	•	•	•	•	•	•	•	•
Wall Mount	•	•	•				•	•
Recessed Mount	•	•	•	•	•	•	•	
Suspension Mount						•	•	
Is an Angular Bend or Curve needed?								
Can be bent*	•	•	•		•	•	•	
Can be curved*	•	•	•		•	•	•	
What is the Track Length?								
One-Way Draw Max Track Length	UP TO 20'	UP TO 16'	UP TO 20'	UP TO 16'	UP TO 16'	UP TO 16'	UP TO 20'	UP TO 16'
Two-Way Draw Max Track Length	UP TO 40'	UP TO 32'	UP TO 20'	UP TO 32'	UP TO 32'	UP TO 32'	UP TO 40'	UP TO 16'
*Architrac® Series 94001 with AMP™ Motorization max track length is 16'.								
What are the Fabric Weight requirements? (Weight shown is pounds per linear foot)								
One-Way with Cord, Hand/Baton	4 LBS	2 LBS	4 LBS	4 LBS	4 LBS	4 LBS	4 LBS	4 LBS
Two-Way with Cord, Hand/Baton	4 LBS	2 LBS	4 LBS	4 LBS	4 LBS	4 LBS	4 LBS	4 LBS


*Architrac® Series 94001 with AMP™ Motorization cannot be bent or curved.

ARCHITRAC®


Series 94001 | Multi-Draw System

- **NEW** | AMP™ Motorization available
- Assembled sets includes all necessary components
- Most versatile Architrac® Rod
- Heavy duty, ball bearing pulleys
- Heavy duty, wheeled (Ripplefold™) or ball bearing (pleated) carriers
- Can be curved or bent (not available for AMP™ Motorized tracks)
- Wall or ceiling mount available
- Multiple draw options available; cord, baton/hand or AMP™ Motorization

Available Draw Types

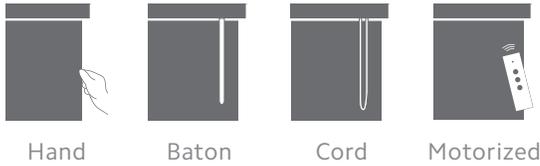


Available Colors

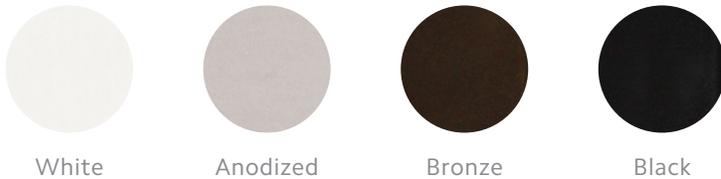


Additional Information

For more detailed information about this track, please visit our resource library at kirsch.com.


DIMENSIONS



WALL MOUNT



CEILING MOUNT

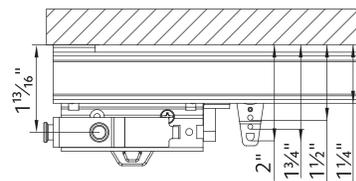


DRAW	MOUNT		MAXIMUM TRACK SET	MAXIMUM FABRIC WEIGHT	LBS. PER FOOT
ONE-WAY	CEILING WALL RECESSED	Cord, Hand/Baton	20	80	4
		AMP™	16	64	4
TWO-WAY	CEILING WALL RECESSED	Cord, Hand/Baton	40	160	4
		AMP™	16	64	4

Max track lengths and maximum fabric weights do not apply to curved tracks. Send complete specifications and fabric weight to customer service for feasibility.

AVAILABLE BENDS * Architrac® Series 94001 with AMP™ Motorization cannot be bent or curved.




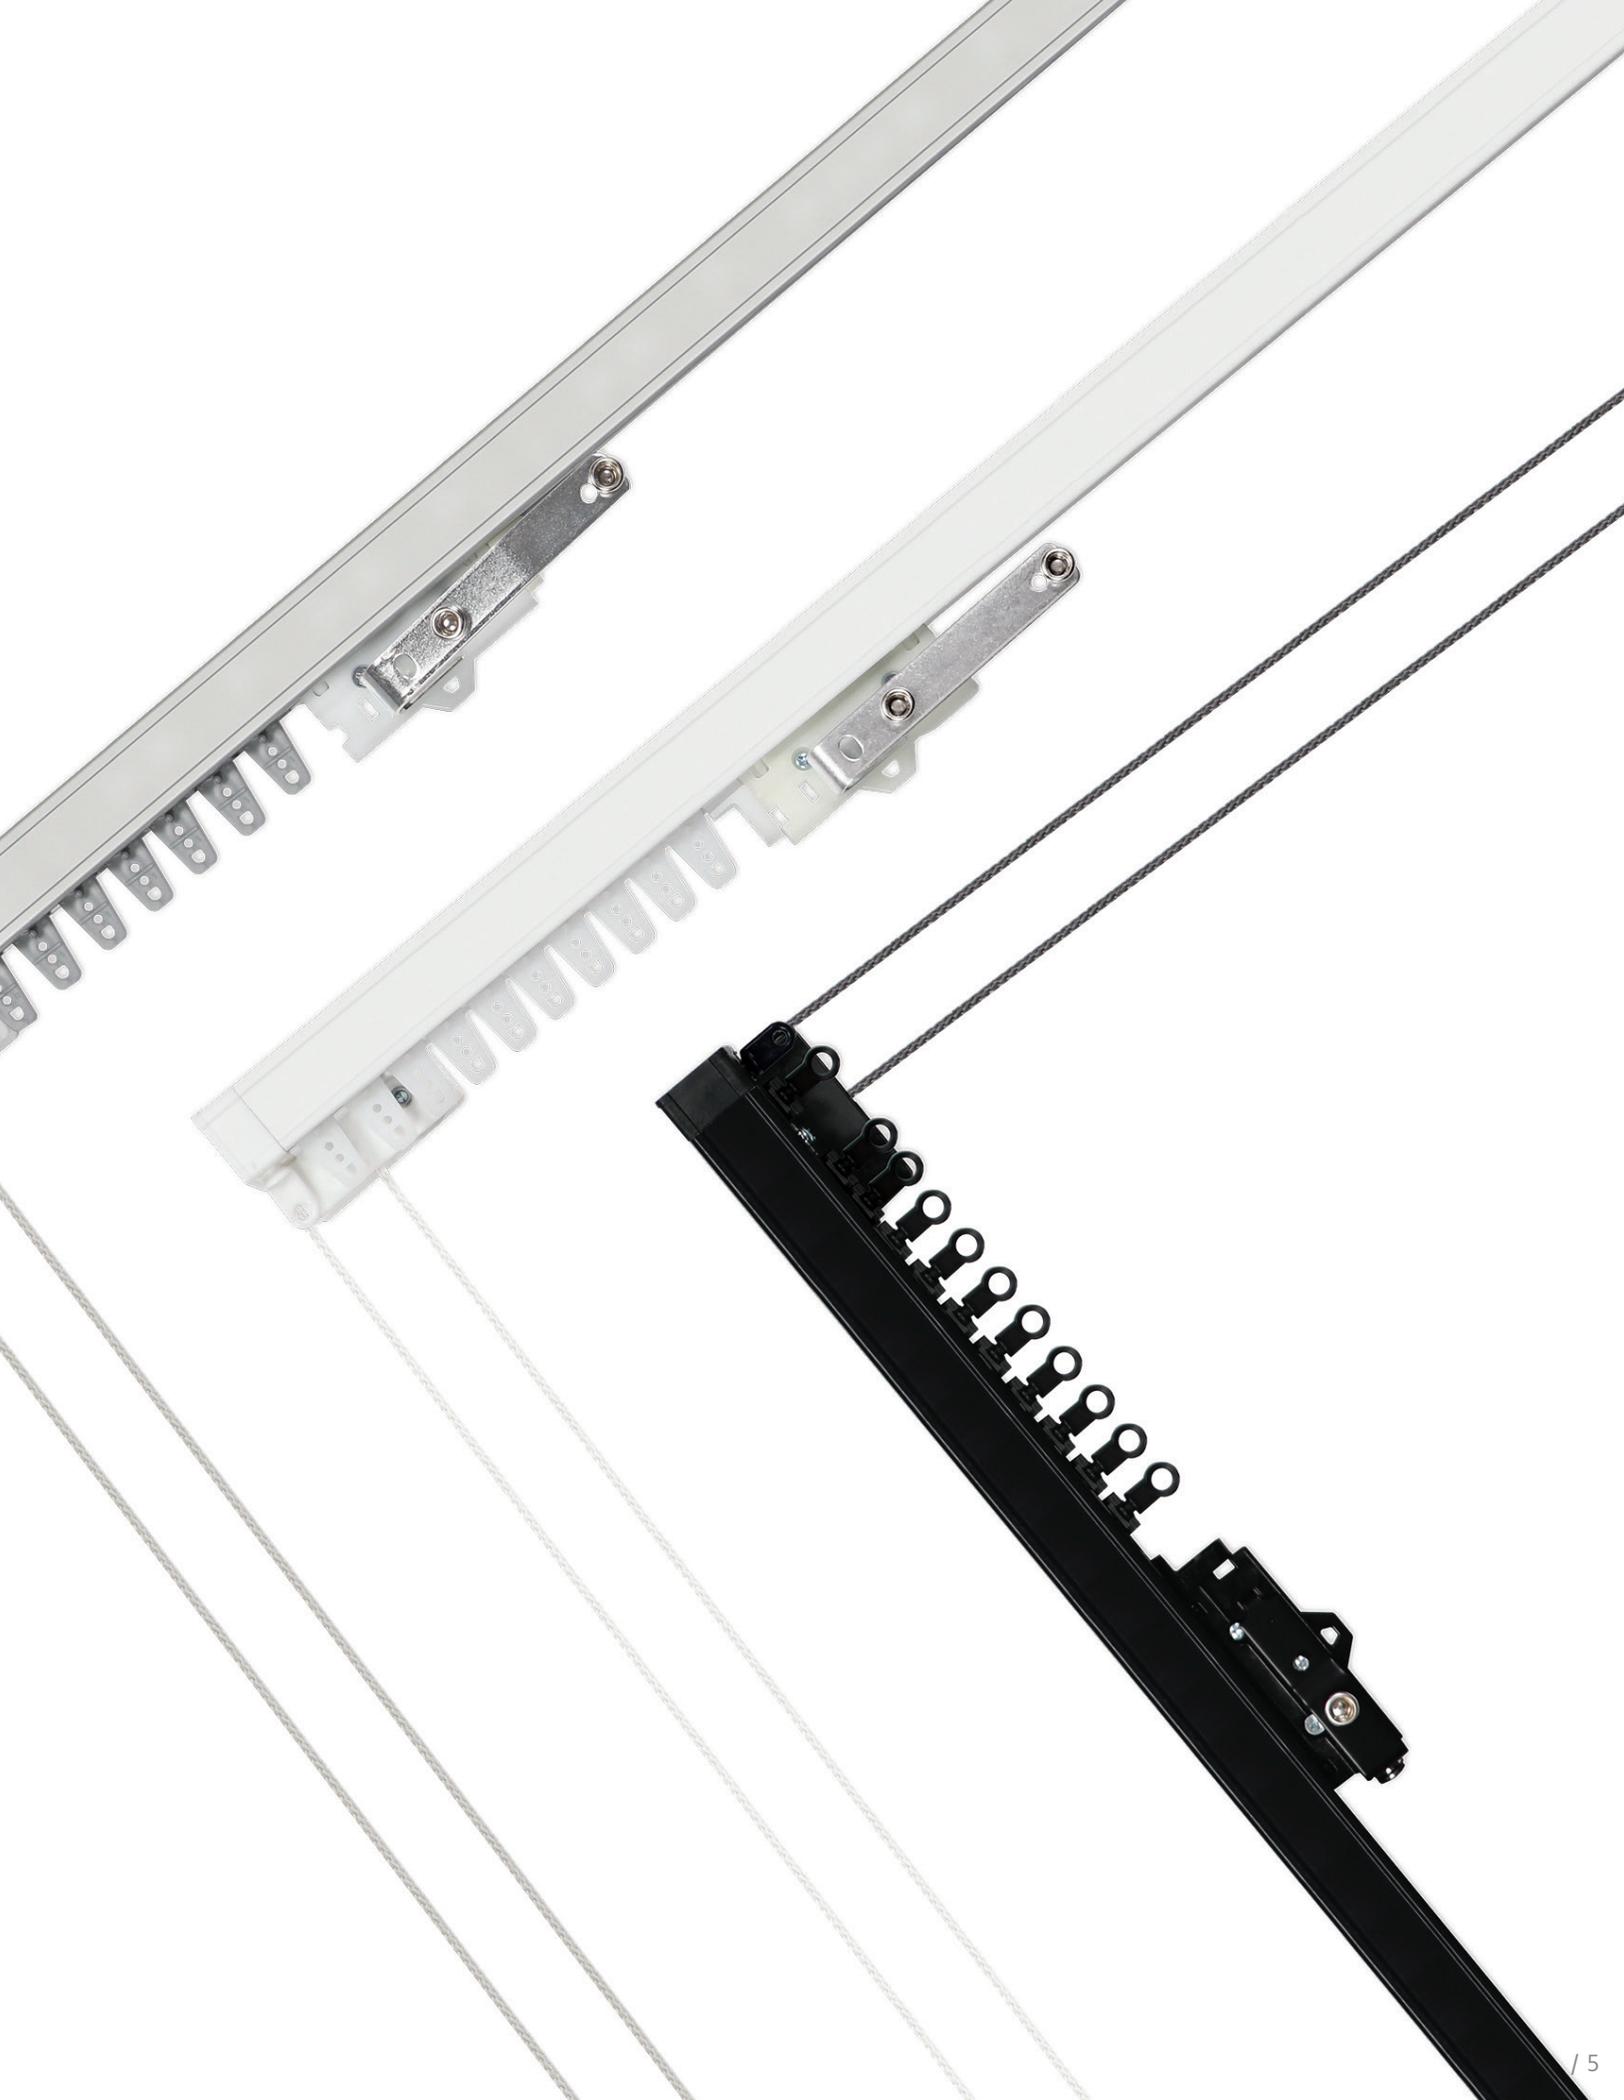


AMP™ MOTORIZATION




Motorization System

- Soft start/stop & manual operation
- Tug feature; when drapery is pulled the motor will traverse the drapery
- Automatic limits on end stop
- Favorite/intermediate position available
- Dry contact for external control
- RF Remote and Wall Switches
- Setting with buttons on motor unit
- Setting with external dry contact switch
- LED Indicators
- One-Way and Two-Way Draw
- Pleated
- Ripplefold™
- AMP™ App with AMP™ USB Bridge

Additional Information

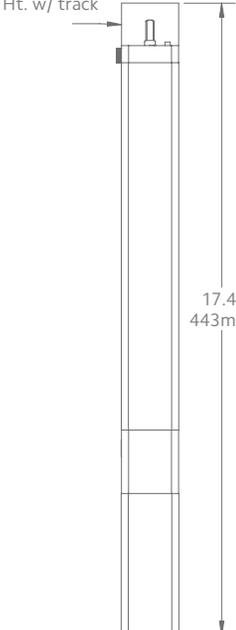SIDE VIEW	FRONT VIEW	BOTTOM VIEW	MOTORIZED TRACK FEATURES	AMP™ MOUNT
			Power Supply	DC 16.5V=0.89A (100-240VAC 50/60Hz 0.5A)
			Amperage	2.55Ah
			Average Linear Speed	7.8 inches/sec
			Power Consumption	40 watts
			Torque	1.2Nm
			Variable Speed	80, 100 & 120 rpm
			Power Cable Length	6 feet
			Certifications	UL/CE
			Max Track Length	Estate™ – 16ft Architrac® 94001 – 40ft
			Max. Load	64 lbs

Component Overview

ITEM	PRODUCT NUMBER & FINISH	DESCRIPTION	ITEM	PRODUCT NUMBER & FINISH	DESCRIPTION
	62001300 White	AMP Motor RF 2W DC Drapery Motor 1.2Nm-20cm 14.8V		62109000 White	AMP Wall Switch Surface RF 2W 15 Channel
	62201300 White	AMP Battery Charger 16.5V/0.89A		62108000 White	AMP Wall Switch RF 2W 15 Channel
	62101000 White	AMP Remote Control RF 2W 15 Channel		84531025 White	AMP Drapery Motorhead Adapter Right
	62101010 Black	AMP Remote Control RF 2W 15 Channel		84532025 White	AMP Drapery Motorhead Adapter Left
	62102000 White	AMP Gateway USB Bridge			

* AMP™ Motorization is available on Architrac® Series 94001 and Estate™ Rods only.




ARCHITRAC®

Series 93001 | Cord Draw System

- Assembled set includes all necessary components
- Low profile track (5/8")
- Self lubricating end pulleys
- Front loading carriers (pleated) for easy installation
- Can be curved or bend
- Wall or ceiling mount available

Available Draw Types



Cord

Available Colors




White


Additional Information

For more detailed information about this track, please visit our resource library at kirsch.com.


DIMENSIONS



WALL MOUNT



CEILING MOUNT

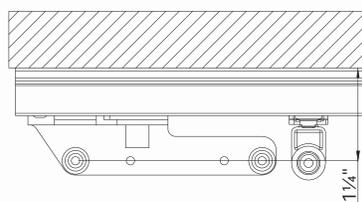

DRAW	MOUNT	MAXIMUM TRACK SET	MAXIMUM FABRIC WEIGHT	LBS. PER FOOT
ONE-WAY	CEILING WALL RECESSED	16'	32 LBS.	2 LBS.
TWO-WAY	CEILING WALL RECESSED	32'	64 LBS.	2 LBS.


Max track lengths and maximum fabric weights do not apply to curved tracks.
Send complete specifications and fabric weight to customer service for feasibility.

AVAILABLE BENDS

Style 1: Recess



Style 2: Bow



Style 3: Bay



Style 4: Corner



Style 5: Curve





ARCHITRAC®

Series 94003 | Baton Draw System

- Assembled sets includes all necessary components
- Most versatile baton draw track
- Heavy duty, wheeled (Ripplefold™) or ball bearing (pleated) carriers
- Can be curved or bent
- Wall or ceiling mount available
- Baton options available

Available Draw Types



Hand

Baton

Available Colors



White



Anodized



Bronze




Black


Additional Information

For more detailed information about this track, please visit our resource library at kirsch.com.


DIMENSIONS



WALL MOUNT



CEILING MOUNT

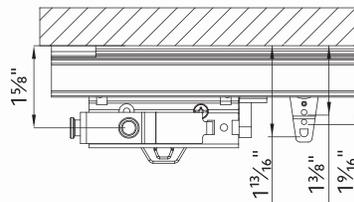

DRAW	MOUNT	MAXIMUM TRACK SET	MAXIMUM FABRIC WEIGHT	LBS. PER FOOT
ONE-WAY	CEILING WALL RECESSED	20'	80 LBS.	4 LBS.
TWO-WAY	CEILING WALL RECESSED	40'	160 LBS.	4 LBS.


Max track lengths and maximum fabric weights do not apply to curved tracks. Send complete specifications and fabric weight to customer service for feasibility.

AVAILABLE BENDS

Style 1: Recess



Style 2: Bow



Style 3: Bay



Style 4: Corner



Style 5: Curve





ARCHITRAC®

Series 94004 | Baton Draw System

- Assembled sets includes all necessary components
- Low profile, baton draw rod (3/4")
- Heavy duty, wheeled (Ripplefold™) or ball bearing (pleated) carriers
- Cannot be curved or bent
- Ceiling mount only (Track pre-drilled 16" on center for direct ceiling mount)
- Baton options available

Available Draw Types



Hand

Baton

Available Colors



White



Anodized



Bronze




Black


Additional Information

For more detailed information about this track, please visit our resource library at kirsch.com.

DIMENSIONS



CEILING MOUNT

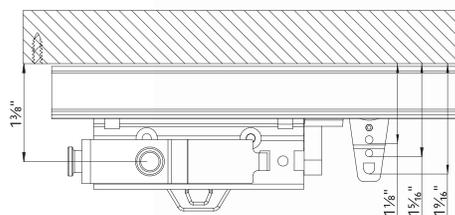

DRAW	MOUNT	MAXIMUM TRACK SET	MAXIMUM FABRIC WEIGHT	LBS. PER FOOT
ONE-WAY	CEILING RECESSED	16'	64 LBS.	4 LBS.
TWO-WAY	CEILING RECESSED	32'	128 LBS.	4LBS.




ARCHITRAC®

Series 94005 | Baton Draw System

- Assembled sets includes all necessary components
- Heavy duty, wheeled (Ripplefold™) or ball bearing (pleated) carriers
- Can be curved or bent
- Ceiling mount only (Track pre-drilled 16" on center for direct ceiling mount)
- Baton options available

Available Draw Types



Hand

Baton

Available Colors



White



Anodized



Bronze




Black


Additional Information

For more detailed information about this track, please visit our resource library at kirsch.com.

DIMENSIONS



CEILING MOUNT

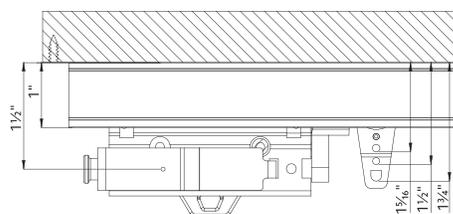

DRAW	MOUNT	MAXIMUM TRACK SET	MAXIMUM FABRIC WEIGHT	LBS. PER FOOT
ONE-WAY	CEILING RECESSED	16'	64 LBS.	4 LBS.
TWO-WAY	CEILING RECESSED	32'	128 LBS.	4 LBS.


Max track lengths and maximum fabric weights do not apply to curved tracks. Send complete specifications and fabric weight to customer service for feasibility.

AVAILABLE BENDS

Style 1: Recess



Style 2: Bow



Style 3: Bay




Style 4: Corner



Style 5: Curve



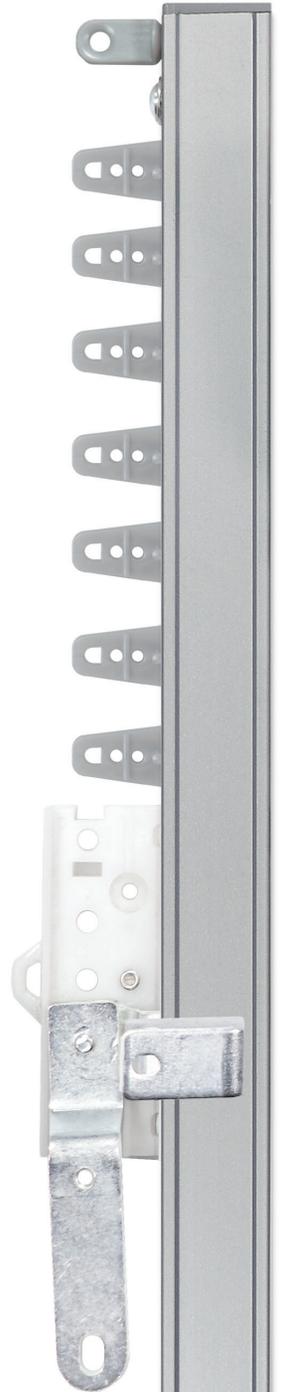

ARCHITRAC®

Series 9046 | Cubicle System

- Assembled sets includes all necessary components
- Low profile, cubicle track (1/2")
- Ideal for cubicle curtains for commercial applications
- Can be curved or bent
- Baton options available
- Pleated or cubicle carriers

Available Draw Types



Hand

Baton

Available Colors



White



Anodized



Bronze




Black


Additional Information

For more detailed information about this track, please visit our resource library at kirsch.com.

DIMENSIONS



CEILING MOUNT

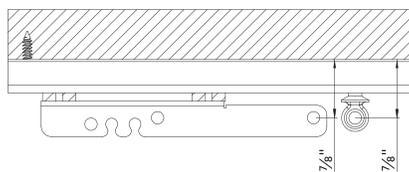


DRAW	MOUNT	MAXIMUM TRACK SET	MAXIMUM FABRIC WEIGHT	LBS. PER FOOT
ONE-WAY	CEILING RECESSED SUSPENSION	16'	64 LBS.	4 LBS.
TWO-WAY	CEILING RECESSED SUSPENSION	32'	128 LBS.	4 LBS.

Max track lengths and maximum fabric weights do not apply to curved tracks. Send complete specifications and fabric weight to customer service for feasibility.

AVAILABLE BENDS

<p>Cubicle Style 1: L-Shaped</p>	<p>Cubicle Style 2: Long-U</p>	<p>Cubicle Style 3: J-Track</p>	<p>Cubicle Style 4: J-Track Offset Right</p>	<p>Cubicle Style 5: J-Track Offset Left</p>
<p>Cubicle Style 6: Obtuse J-Track Right</p>	<p>Cubicle Style 7: Obtuse J-Track Left</p>	<p>Cubicle Style 8: Straight Offset Right</p>	<p>Cubicle Style 9: Straight Offset Left</p>	<p>Cubicle Style 10: Curved</p>



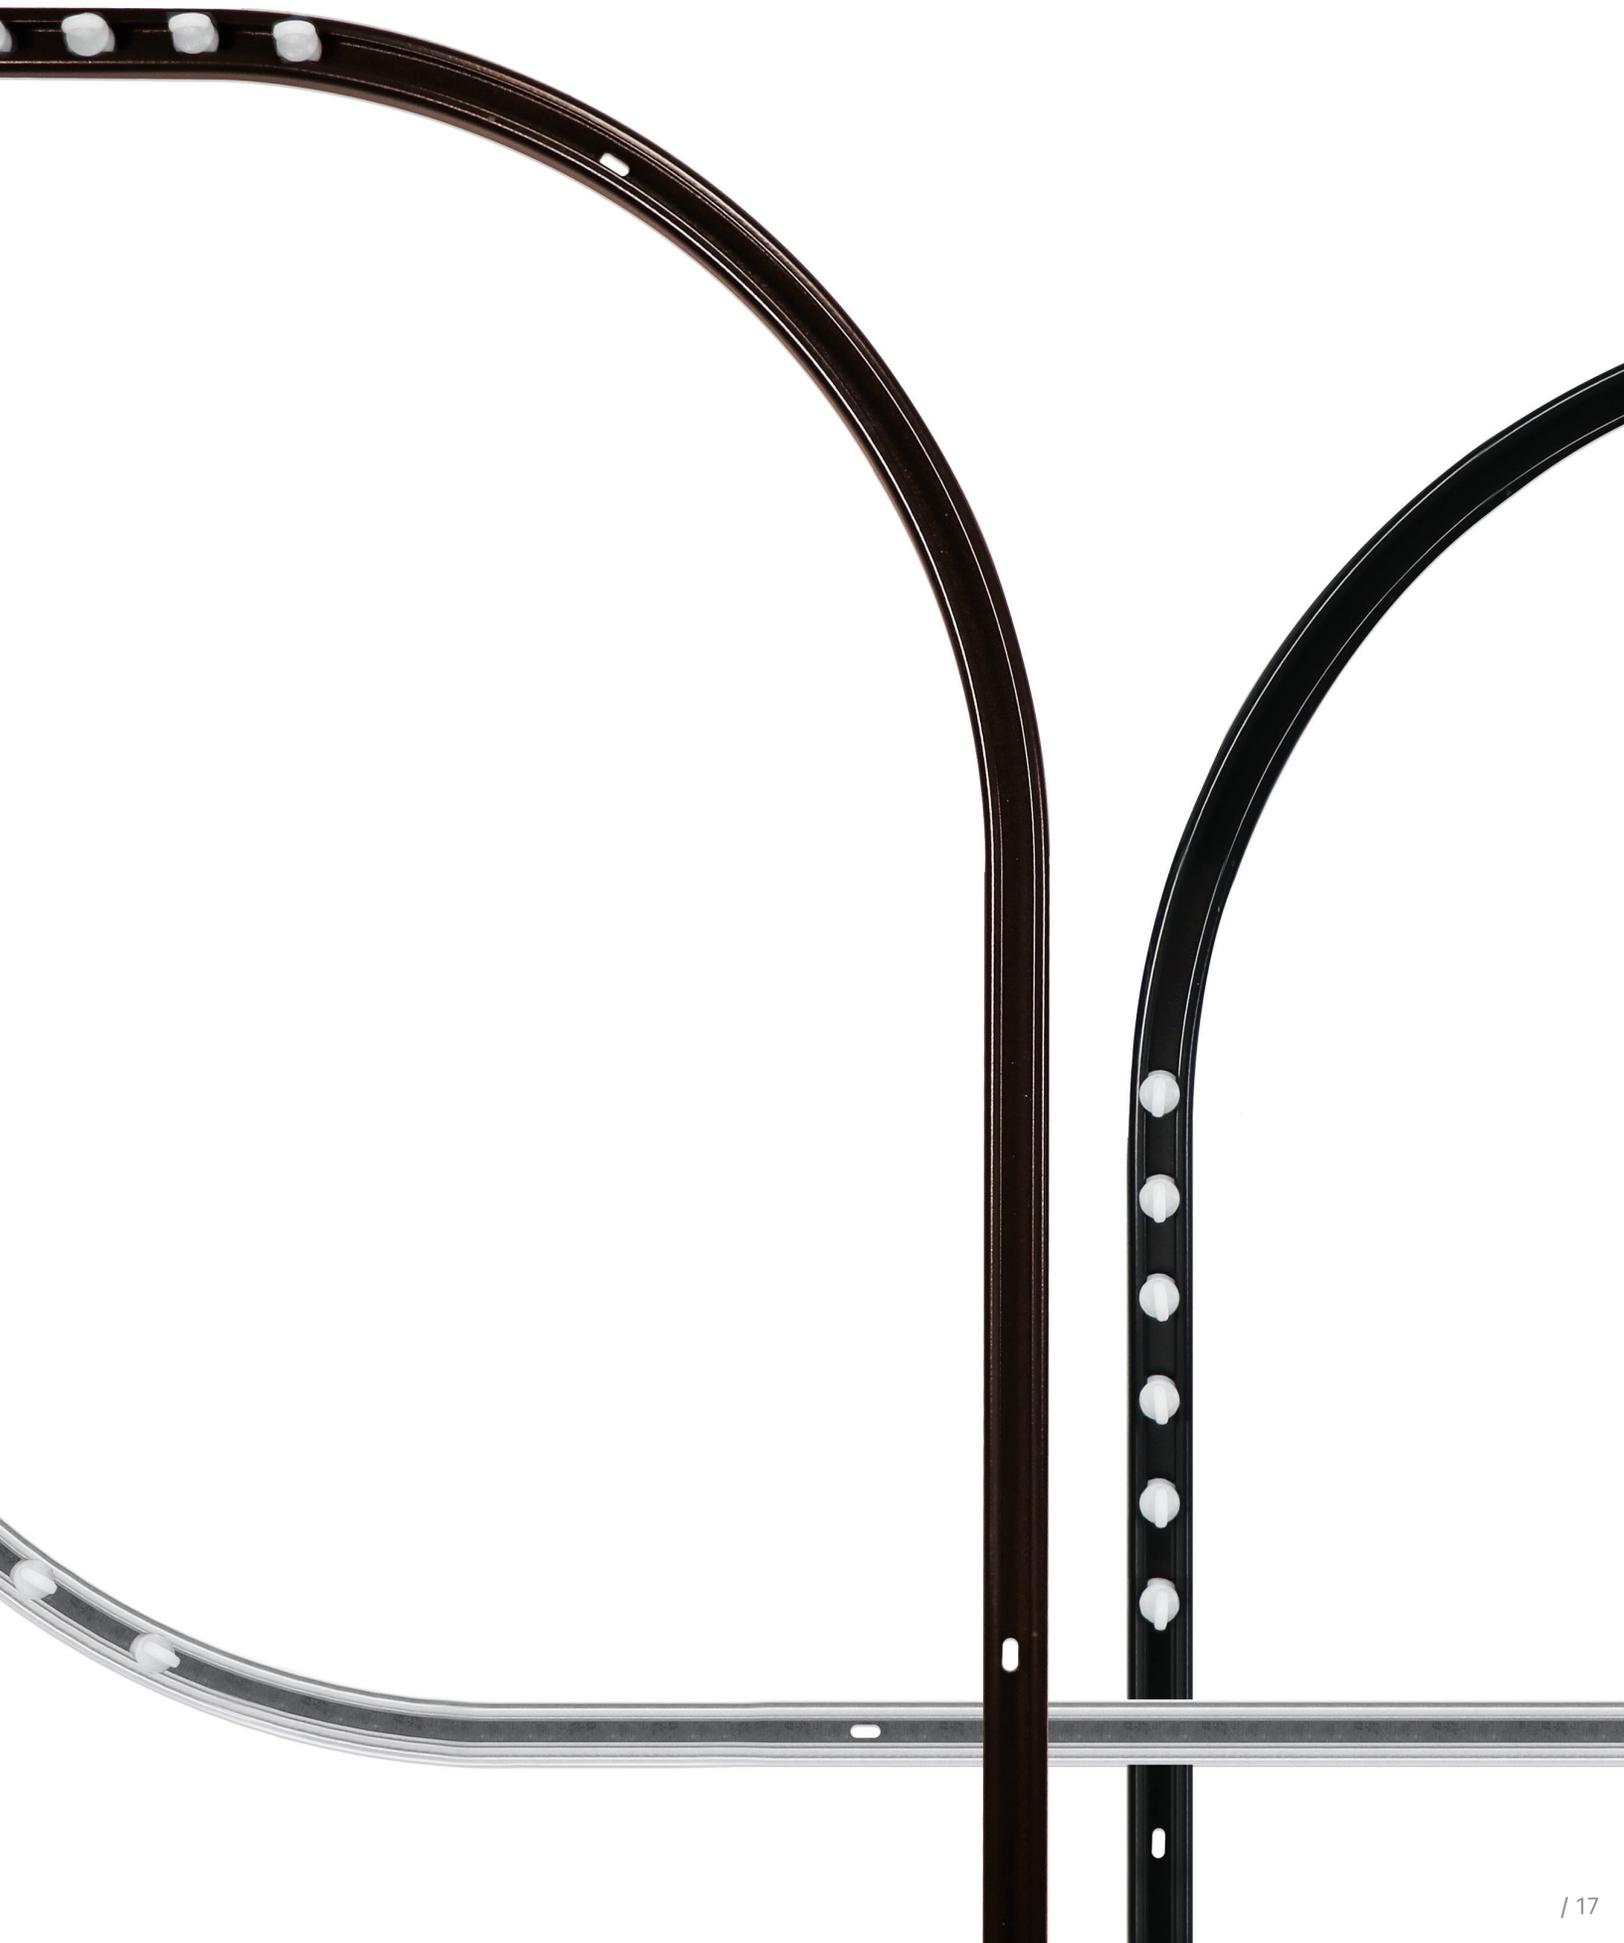


ARCHITRAC®

Series 9600 | Cubicle System

- Assembled sets includes all necessary components
- Heavy duty, cubicle track
- Ideal for cubicle curtains for commercial applications
- Splice available
- Carriers for pleated or cubicle options available
- Wall, ceiling or suspension mount available
- Can be curved or bent

Available Draw Types



Hand



Baton

Available Colors



White



Anodized



Bronze



Black

Additional Information

For more detailed information about this track, please visit our resource library at kirsch.com.

DIMENSIONS		WALL MOUNT (using 81003xxx bracket)	CEILING MOUNT					
				DRAW	MOUNT	MAXIMUM TRACK SET	MAXIMUM FABRIC WEIGHT	LBS. PER FOOT
ONE-WAY	CEILING WALL RECESSED SUSPENSION	20'	80 LBS.	4 LBS.				
TWO-WAY	CEILING WALL RECESSED SUSPENSION	40'	160 LBS.	4 LBS.				

Max track lengths and maximum fabric weights do not apply to curved tracks. Send complete specifications and fabric weight to customer service for feasibility.

AVAILABLE BENDS

Cubicle Style 1: L-Shaped 	Cubicle Style 2: Long-U 	Cubicle Style 3: J-Track 	Cubicle Style 4: J-Track Offset Right 	Cubicle Style 5: J-Track Offset Left
Cubicle Style 6: Obtuse J-Track Right 	Cubicle Style 7: Obtuse J-Track Left 	Cubicle Style 8: Straight Offset Right 	Cubicle Style 9: Straight Offset Left 	Cubicle Style 10: Curved



K-RAIL

K-Rail | 1 3/8" Decorative System

- Assembled set includes all necessary components
- Versatile baton draw track adds a decorative element allowing for color coordination
- Compatible with every 1 3/8" finial
- Color coordinated to match with any finish
- Heavy duty, wheeled Ripplefold™ or ball bearing pleated carriers
- Wall or ceiling mount available
- Baton options available

Available Draw Types



Hand

Baton

Available Colors



White



Anodized



Bronze




Black


Additional Information

For more detailed information about this track, please visit our resource library at kirsch.com.


DIMENSIONS




WALL MOUNT



CEILING MOUNT



DRAW	MOUNT	MAXIMUM TRACK SET	MAXIMUM FABRIC WEIGHT	LBS. PER FOOT
ONE-WAY	CEILING WALL	16'	64 LBS.	4 LBS.
TWO-WAY	CEILING WALL	16'	64 LBS.	4 LBS.

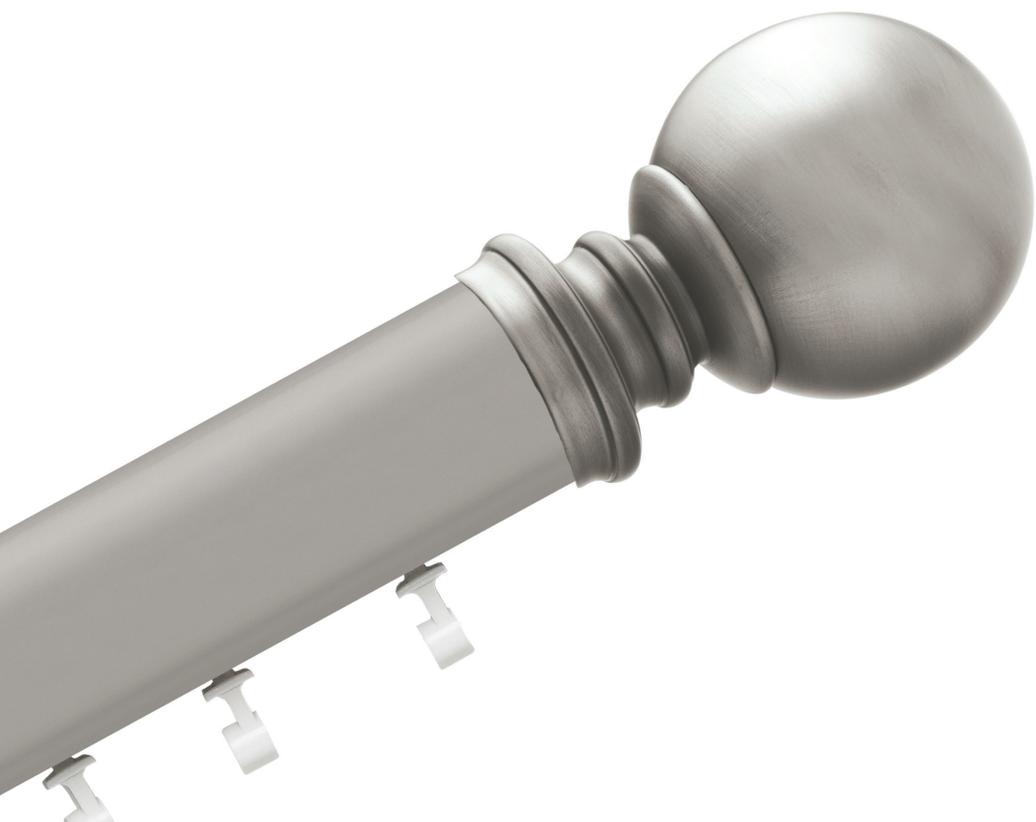

 KIRSCH®

BUCKINGHAM®
redefining luxury

DESIGNER METALS™
inspiring brilliance

WOOD TRENDS™
renewing traditions

WROUGHT IRON
forging artistry

ARCHITRAC®
practical precision

ESTATE™
innovating comfort