

# K-Rail and Architrac<sup>®</sup> Order Form

ORDER DATE

ACCOUNT #

P.O. #

SIDEMARK

## Account Information

COMPANY NAME

CONTACT FULL NAME

EMAIL

PHONE

SHIP TO/ATTENTION

ADDRESS

CITY

STATE

ZIP

## Drop Ship Address (if different from above)

NAME OR COMPANY

PHONE

ADDRESS

CITY

STATE

ZIP

## Order Specifications

ORDER QTY	PRODUCT NUMBER	LENGTH (inches)
		"

### Draw Preference

- ONE-WAY DRAW | STACK LEFT
- ONE-WAY DRAW | STACK RIGHT
- TWO-WAY DRAW

### Control Type

- CORD
- HAND
- BATON

**Briza™ Motorization for Architrac® Series 94001 only.**  
Max track length 20 ft.

- BRIZA™ MOTORIZATION
- BRIZA™ MOTORIZATION WITH NEO SMART CONTROLLER
- BRIZA™ MOTORIZATION WITH SOMFY® MOTOR ADAPTER

### Control/Motor Location

- LEFT
- RIGHT

### Cord Length

\_\_\_\_\_ " CORD LENGTH (inches)  
(standard is 8 feet)

### Drapery/Master Carrier Style

- RIPPLEFOLD™ | OVERLAP
- RIPPLEFOLD™ | BUTT MASTER
- PLEATED | OVERLAP
- PLEATED | THROUGH FABRIC
- PLEATED | OVER THE TOP
- CUBICLE

### Ripplefold™ Fullness

- 120%
- 100%
- 80%
- 60%

### Mount Style

- WALL MOUNT
- CEILING MOUNT

### Return Size

- 3½"
- 6"
- OTHER \_\_\_\_\_ " (inches)

### Extra Parts

\_\_\_\_ SLIDES  
\_\_\_\_ BRACKETS

### Bend Style

Please see reverse side for bend styles.  
Architrac® Only.

### Track Only

Select the option below if you only need a track with no components.

- TRACK ONLY - NO COMPONENTS

### Splicing

Rods over 8 ft can be spliced. Please note splice instructions.

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

### Total Pricing

(totals from both sides)

\$ \_\_\_\_\_  
TOTAL ROD COST

\$ \_\_\_\_\_  
TOTAL COMPONENT COST

\$ \_\_\_\_\_  
TOTAL COST

# K-Rail and Architrac<sup>®</sup> Order Form

ORDER DATE \_\_\_\_\_

ACCOUNT # \_\_\_\_\_

P.O. # \_\_\_\_\_

SIDEMARK \_\_\_\_\_

## IMPORTANT: Please Read Before Placing Order

### How to Order

- Dimensions are shown from top view of rod
- Illustrations are of various wall designs
- Select the design that fits your room
- Provide all the measurements requested
- Indicate degree measurements of all angles (Angle measuring protractor, order 23573C21)
- All Briza<sup>™</sup> Motorized tracks and Briza<sup>™</sup> Motorized with Somfy<sup>®</sup> adapter tracks cannot be bent or curved.

- Architrac Series 94001 cannot be convex curved or convex bent

### ALL ORDERS MUST INCLUDE RETURNS, EXCEPT STYLE 4: CORNER, WITH A 90° BEND

- The definition of return is the distance from the wall to the front side of the rod
- On double rod sets, provide return measurements for both rods

### Custom Styles

For all styles you must provide a drawing with necessary measurements plus a full size pattern of the wall area to which the rod is to be mounted. Be sure to locate each end of the rod on your pattern. Give style track and set number. Unless stated, measurements given are wall measurements and the factory will make allowances.

## Order Specifications

### Bend Style

*Architrac<sup>®</sup> Only*

- STYLE 1: RECESS
- STYLE 2: BOW
- STYLE 3: BAY
- STYLE 4: CORNER
- STYLE 5: CURVED

### Cubicle Bend Style

*Architrac<sup>®</sup> 9046 & 9600 Only*

- CUBICLE STYLE 1: L-SHAPED
- CUBICLE STYLE 2: LONG-U
- CUBICLE STYLE 3: J-TRACK
- CUBICLE STYLE 4: J-TRACK OFFSET | RIGHT
- CUBICLE STYLE 5: J-TRACK OFFSET | LEFT
- CUBICLE STYLE 6: OBTUSE J-TRACK | RIGHT
- CUBICLE STYLE 7: OBTUSE J-TRACK | LEFT
- CUBICLE STYLE 8: STRAIGHT OFFSET | RIGHT
- CUBICLE STYLE 9: STRAIGHT OFFSET | LEFT
- CUBICLE STYLE 10: CURVED

### Measurements

- A \_\_\_\_\_
- B \_\_\_\_\_
- C \_\_\_\_\_
- D \_\_\_\_\_
- E \_\_\_\_\_
- F \_\_\_\_\_
- G \_\_\_\_\_
- H \_\_\_\_\_


### Degree of Bend

- AB \_\_\_\_\_
- BC \_\_\_\_\_
- CD \_\_\_\_\_
- DE \_\_\_\_\_

### Wall/Rod Measurement

- WALL \_\_\_\_\_
- ROD \_\_\_\_\_

## Bend Styles

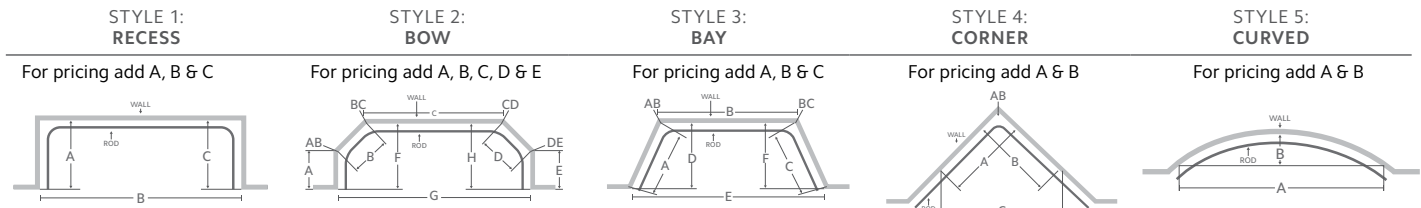

## Cubicle Bend Styles *(Architrac<sup>®</sup> 9046 & 9600 Only)*

